

## Filter Cartridge Housing BECO INTEGRA® CART KL0 Range

Eaton's BECO INTEGRA CART KL0 filter cartridge housings are manufactured of stainless steel AISI 316L and designed for gas or steam filtration.

### Special Features

- Corrosion resistant, stainless steel AISI 316L material
- Increased safety through the use of code 7 adapters (double-leaf bayonet locking)
- The optimized housing design allows thorough and fast cleaning
- Suitable for filtration of gases and particle filtration of steam
- Suitable for hot water or steam sterilization

### Application

All BECO INTEGRA CART KL0 filter cartridge housings are designed for the filtration of media of fluid group 2 according to the Pressure Equipment Directive PED 2014/68/EU. Different stack heights of 10" to 30" allow perfect adaptation of housing size to the filtered product. Thanks to an optimized filtrate area design and a special surface finish, this housing can be perfectly cleaned and sterilized.

BECO INTEGRA CART cartridge housings accept BECO® filter cartridges with code 7 adapter.

### Technical Data


<b>Max. permissible operating pressure:</b>	145 psi (1,000 kPa/10 bar)
<b>Max. permissible operating temperature:</b>	284 °F (140 °C)



KL0-housing with G 1/2" connections

<b>Product contacting parts:</b>	Stainless steel AISI 316L
<b>Gasket:</b>	EPDM
<b>Housing is suitable for:</b>	Media of fluid group 2 according to PED 2014/68/EU
<b>Housing connections:</b>	See table (N1/N2)
<b>Housing closure:</b>	Tri-Clamp
<b>Vent N3:</b>	Sanitary valve G 1/2"
<b>Drain N4:</b>	Sanitary valve G 1/2"
<b>Fittings:</b>	Vent and drain units are included in the scope of supply

Item no.	No. of filter cartridges	Length of filter cartridge in	Dimensions in (mm)				Connections N1/N2	Weight lb (kg)	Volume gal (l)	Permissible pressure psi (bar)	Permissible temperature °F (°C)
			A	B	C	D					
KL011040	1	10"	29.96 (761)	6.22 (158)	7.87 (200)	1.58 (40)	DN 40	14.3 (6.5)	1.00 (3.8)	-14.5/+145 (-1/+10)	14/284 -10/+140
KL012040	1	20"	39.80 (1,011)	6.22 (158)	7.87 (200)	1.58 (40)	DN 40	17.2 (7.8)	1.51 (5.7)	-14.5/+145 (-1/+10)	14/284 -10/+140
KL013040	1	30"	49.65 (1,261)	6.22 (158)	7.87 (200)	1.58 (40)	DN 40	19.8 (9.0)	2.01 (7.6)	-14.5/+145 (-1/+10)	14/284 -10/+140
KL013065	1	30"	49.65 (1,261)	6.22 (158)	8.74 (222)	2.56 (65)	DN 65	19.8 (9.0)	2.01 (7.6)	-14.5/+145 (-1/+10)	14/284 -10/+140
KL0110GA	1	10"	29.96 (761)	6.22 (158)	7.09 (180)	0.63 (16)	½" male thread	14.3 (6.5)	1.00 (3.8)	-14.5/+145 (-1/+10)	14/284 -10/+140
KL0130GA	1	30"	49.65 (1,261)	6.22 (158)	11.26 (286)	1.50 (38)	2 ½" male thread	19.8 (9.0)	2.01 (7.6)	-14.5/+145 (-1/+10)	14/284 -10/+140

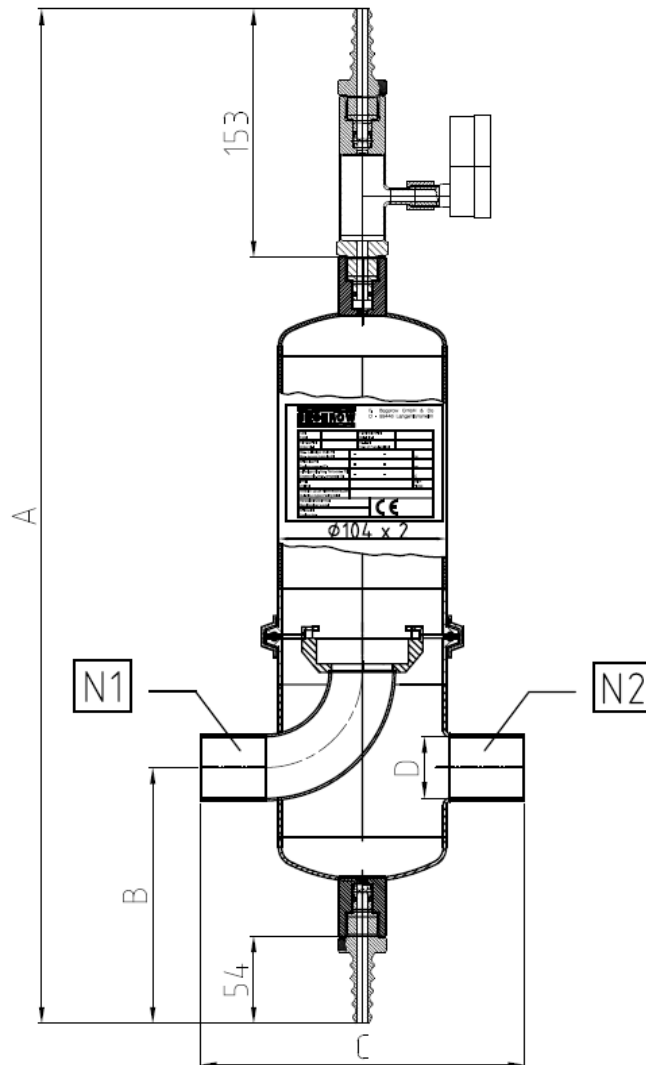



**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altfußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**China**  
No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Singapore**  
100G Pasir Panjang Road #07-08  
Singapore 118523  
Tel: +65 6825-1668

**Brazil**  
Rua Clark, 2061 - Macuco  
13279-400 - Valinhos, Brazil  
Tel: +55 11 3616-8400

**For more information, please  
email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

EN  
1 A 7.2.4  
03-2018

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.



*Powering Business Worldwide*