



MEDICAL | 7.5 HP ROTARY SCROLL AIR COMPRESSORS

EnviroAire **S7**

Gardner Denver has over 150 years of experience in design and manufacturing of the highest quality compressors. The EnviroAire rotary scroll system is the perfect example of our progressive innovation. The NFPA 99 and CSA code compliant EnviroAire series, is designed specifically for medical applications. Gardner Denver takes the lead in delivering superior product performance and overall system reliability.

Standard Equipment

- Continuous operation, 100% duty cycle
- Mounted control panel
 - MediTrol: duplex
 - MediTrol Plus HMI: triplex, quadraplex
- Vinyl lined receiver
- Extremely low noise and vibration
- Premium efficient TEFC motor
- ASME pressure relief valve
- Air-cooled aftercooler with separator and trap
- Remote inlet filter
- Receiver sight and pressure gauges

Available Options

- Galvanized receiver
- Remote tank available in 80, 120 or 240 gallon
- Medical desiccant dryer system with dew point and CO monitoring
- MediTrol Plus HMI control panel (duplex)

Gardner
Denver

BARE AIREND

MODEL	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS
SC7	16.3 × 16.1 × 13.9	61

DUPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
7.5	Base	BENV57D-M	72 × 48 × 51	1240	3340	22.4	2650	16.2
7.5	80	HENV57D-8-M	65 × 34 × 61.5	1400	3340	22.4	2650	16.2
7.5	120	HENV57D-12-M	69 × 34 × 65.5	1500	3340	22.4	2650	16.2
7.5	240	HENV57D-24-M	86 × 40 × 71.5	1700	3340	22.4	2650	16.2

Duplex units have two motors and two pumps on one base/tank. Performance based on full system operation with one compressor in reserve per NFPA 99.

TRIPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
7.5	Base with 80 Remote	BENV57T-M	129 × 48 × 69	2551	3340	44.8	2650	32.4

Triplex units have three airends and three motors stacked on a common base. Performance based on full system operation with one compressor in reserve per NFPA 99. Optional larger 120 or 240 gallon remote tanks available.

QUADRAPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
7.5	Base with 80 Remote	BENV57Q-M	129 × 48 × 69	3267	3340	67.2	2650	48.6

Quadruplex units have four airends and four motors stacked on a common base. Performance based on full system operation with one compressor in reserve per NFPA 99. Optional larger 120 or 240 gallon remote tanks available.

Gardner Denver®

Gardner Denver, Inc.


1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2017 Gardner Denver, Inc. Printed in U.S.A.
GLCS-ENV-MED-S7 2nd Ed. 2/17

Please recycle after use.

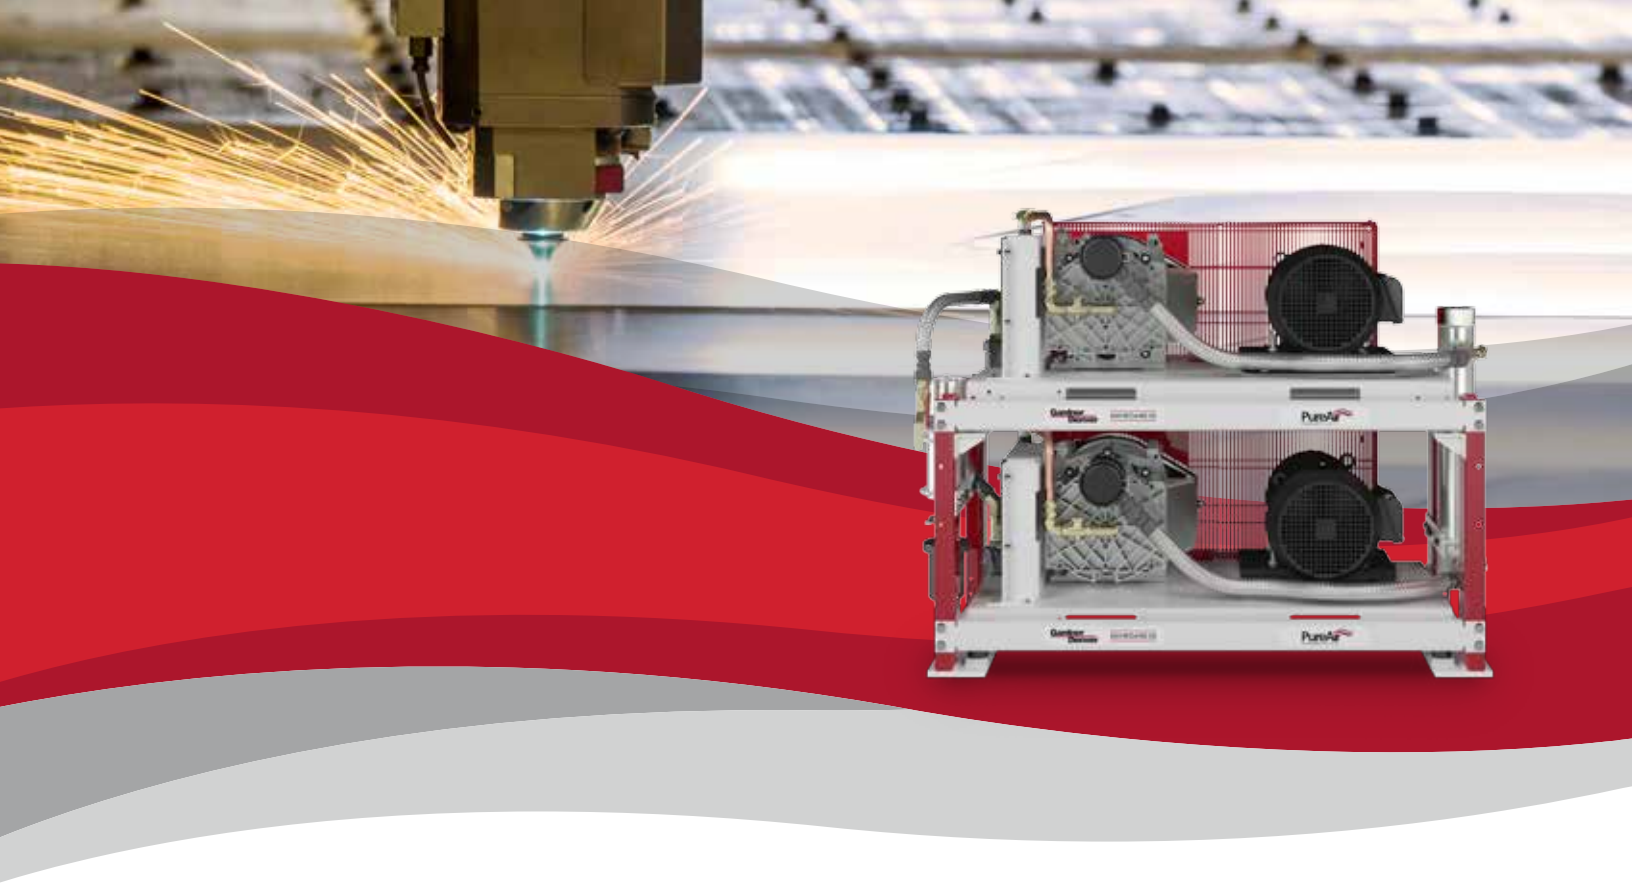

INDUSTRIAL | 5 HP ROTARY SCROLL AIR COMPRESSORS

EnviroAire S5

Gardner Denver EnviroAire compressors provide the reliable, high quality compressed air that you've come to expect from Gardner Denver. EnviroAire compressors offer a wide selection of configurations and top-quality available options. Gardner Denver designed this series specifically for industrial and laboratory applications that require 100% oil-less air. Experience proven results with Gardner Denver—the leader in durability, reliability and efficiency.

Standard Equipment

- Continuous operation, 100% duty cycle
- 5 Micron industrial grade intake air filter
- ASME coded receiver
- Premium efficient TEFC motor
- Unique tip seal design
- Low sound levels and vibration
- Re-greasable bearings
- Integral cooling fan
- Easy accessibility for maintenance
- 1-Year package warranty
- 1-Year airend warranty

Available Options

- Tank Sizes—30, 80, 120 or 240 gallon
 - Galvanized receiver
 - Vinyl (epoxy) lined receiver
- Electronic tank drain
- Mass. code fittings
- Starter
- High temp switch
- Dryer options
 - Refrigerated dryer
 - Desiccant dryer

Gardner
Denver

BARE AIREND

MODEL	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS
SC5	13.6 × 14.7 × 11.4	45

SIMPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
5	Base	BENV55	38 × 21 × 17	260	3100	13.9	2900	12.5
5	30	HENV55-3	43 × 24 × 38	535	3100	13.9	2900	12.5
5	80	HENV55-8	67 × 24 × 42	660	3100	13.9	2900	12.5
5	120	HENV55-12	71 × 27 × 46	760	3100	13.9	2900	12.5

DUPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
5	Base	BENVSD	48 × 22 × 36.5	713	3100	27.8	2900	25
5	80	HENVSD-8	65 × 26 × 61.5	1110	3100	27.8	2900	25
5	120	HENVSD-12	69 × 27 × 65.5	1210	3100	27.8	2900	25
5	240	HENVSD-24	86 × 33 × 71.5	1430	3100	27.8	2900	25

Simplex CFM values are doubled for duplex units. Duplex units have two motors and two pumps on one base/tank.

TRIPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
5	Base	BENV55T	48 × 22 × 54.5	1062	3100	41.7	2900	37.5

Simplex CFM values are tripled for triplex units. Triplex units have three airends and three motors stacked on a common base.

QUADRAPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
5	Base	BENV55Q	48 × 22 × 72	1415	3100	55.6	2900	50

Simplex CFM values are quadrupled for Quadraplex units. Quadraplex units have four airends and four motors stacked on a common base.

Gardner Denver®


Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2017 Gardner Denver, Inc. Printed in U.S.A.
GLCS-ENV-IND-S5 2nd Ed. 2/17





MEDICAL | 5 HP ROTARY SCROLL AIR COMPRESSORS

EnviroAire S5

Gardner Denver has over 150 years of experience in design and manufacturing of the highest quality compressors. The EnviroAire rotary scroll system is the perfect example of our progressive innovation. The NFPA 99 and CSA code compliant EnviroAire series, is designed specifically for medical applications. Gardner Denver takes the lead in delivering superior product performance and overall system reliability.

Standard Equipment

- Continuous operation, 100% duty cycle
- Mounted control panel
 - MediTrol: duplex
 - MediTrol Plus HMI: triplex, quadraplex
- Vinyl lined receiver
- Extremely low noise and vibration
- Premium efficient TEFC motor
- ASME pressure relief valve
- Air-cooled aftercooler with separator and trap
- Remote inlet filter
- Receiver sight and pressure gauges

Available Options

- Galvanized receiver
- Remote tank available in 80, 120 or 240 gallon
- Medical desiccant dryer system with dew point and CO monitoring
- MediTrol Plus HMI control panel (duplex)

Gardner
Denver

BARE AIREND

MODEL	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS
SC5	13.6 × 14.7 × 11.4	45

DUPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
5	Base	BENV55D-M	72 × 48 × 43.5	1124	3100	14.1	2900	12.7
5	80	HENV55D-8-M	65 × 34 × 61.5	1400	3100	14.1	2900	12.7
5	120	HENV55D-12-M	69 × 34 × 65.5	1500	3100	14.1	2900	12.7
5	240	HENV55D-24-M	86 × 40 × 71.5	1700	3100	14.1	2900	12.7

Duplex units have two motors and two pumps on one base/tank. Performance based on full system operation with one compressor in reserve per NFPA 99.

TRIPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
5	Base with 80 Remote	BENV55T-M	129 × 48 × 69	2238	3100	28.2	2900	25.4

Triplex units have three airends and three motors stacked on a common base. Performance based on full system operation with one compressor in reserve per NFPA 99. Optional larger 120 or 240 gallon remote tanks available.

QUADRAPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
5	Base with 80 Remote	BENV55Q-M	129 × 48 × 69	3011	3100	42.3	2900	38.1

Quadruplex units have four airends and four motors stacked on a common base. Performance based on full system operation with one compressor in reserve per NFPA 99. Optional larger 120 or 240 gallon remote tanks available.

Gardner Denver®

Gardner Denver, Inc.


1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2017 Gardner Denver, Inc. Printed in U.S.A.
GLCS-ENV-MED-S5 2nd Ed. 2/17

Please recycle after use.

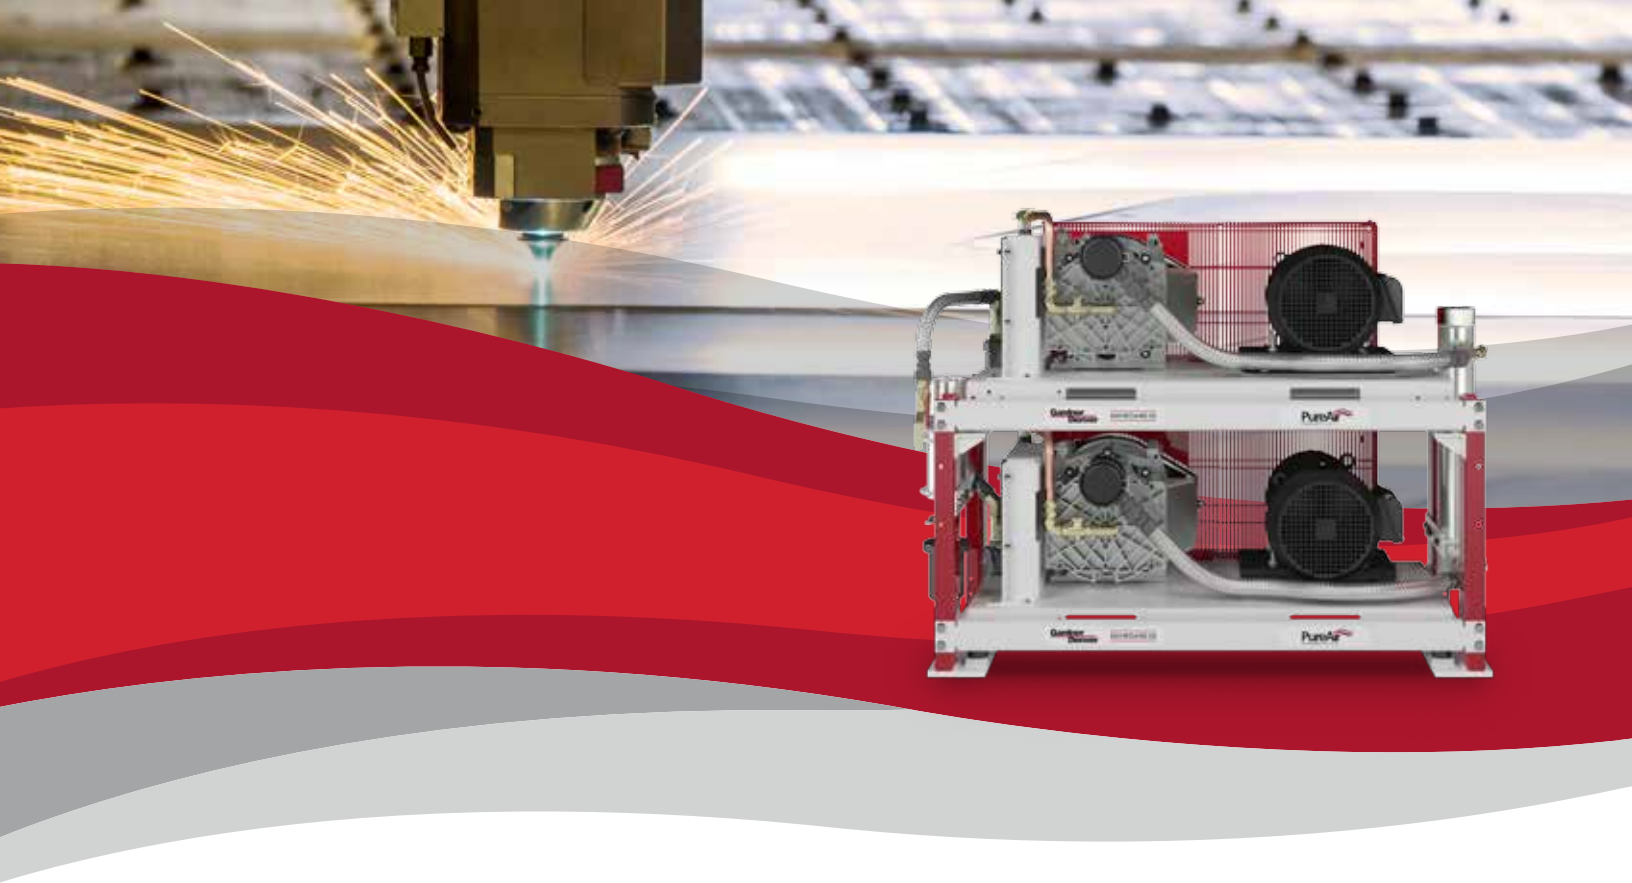

INDUSTRIAL | 3 HP ROTARY SCROLL AIR COMPRESSORS

EnviroAire S3

Gardner Denver EnviroAire compressors provide the reliable, high quality compressed air that you've come to expect from Gardner Denver. EnviroAire compressors offer a wide selection of configurations and top-quality available options. Gardner Denver designed this series specifically for industrial and laboratory applications that require 100% oil-less air. Experience proven results with Gardner Denver—the leader in durability, reliability and efficiency.

Standard Equipment

- Continuous operation, 100% duty cycle
- 5 Micron industrial grade intake air filter
- ASME coded receiver
- Premium efficient TEFC motor
- Unique tip seal design
- Low sound levels and vibration
- Re-greasable bearings
- Integral cooling fan
- Easy accessibility for maintenance
- 1-Year package warranty
- 1-Year airend warranty

Available Options

- Tank Sizes—30, 80 or 120 gallon
 - Galvanized receiver
 - Vinyl (epoxy) lined receiver
- Electronic tank drain
- Mass. code fittings
- Starter
- High temp switch
- Dryer options
 - Refrigerated dryer
 - Desiccant dryer

Gardner
Denver

BARE AIREND

MODEL	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS
SC3-5	13.6 × 14.7 × 11.4	45

SIMPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
3	Base	BENV3	38 × 21 × 17	260	2200	9.2	1950	7.6
3	30	HENV3-3	43 × 24 × 38	535	2200	9.2	1950	7.6
3	80	HENV3-8	67 × 24 × 42	660	2200	9.2	1950	7.6
3	120	HENV3-12	71 × 27 × 46	760	2200	9.2	1950	7.6

**Gardner
Denver®**

Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2017 Gardner Denver, Inc. Printed in U.S.A.
GLCS-ENV-IND-S3 2nd Ed. 2/17

Please recycle after use.



MEDICAL | 10 HP ROTARY SCROLL AIR COMPRESSORS

EnviroAire S10

Gardner Denver has over 150 years of experience in design and manufacturing of the highest quality compressors. The EnviroAire rotary scroll system is the perfect example of our progressive innovation. The NFPA 99 and CSA code compliant EnviroAire series, is designed specifically for medical applications. Gardner Denver takes the lead in delivering superior product performance and overall system reliability.

Standard Equipment

- Continuous operation, 100% duty cycle
- Mounted control panel
 - MediTrol: duplex
 - MediTrol Plus HMI: triplex, quadraplex
- Vinyl lined receiver
- Extremely low noise and vibration
- Premium efficient TEFC motor
- ASME pressure relief valve
- Air-cooled aftercooler with separator and trap
- Remote inlet filter
- Receiver sight and pressure gauges

Available Options

- Galvanized receiver
- Remote tank available in 80, 120 or 240 gallon
- Medical desiccant dryer system with dew point and CO monitoring
- MediTrol Plus HMI control panel (duplex)

Gardner
Denver

BARE AIREND

MODEL	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS
SC10	16.8 × 16.8 × 13.9	62

DUPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
10	Base	BENVS10D-M	73 × 48 × 53.5	1322	3750	32.3	3216	27.8
10	80	HENVS10D-8-M	65 × 34 × 61.5	1400	3750	32.3	3216	27.8
10	120	HENVS10D-12-M	69 × 34 × 65.5	1500	3750	32.3	3216	27.8
10	240	HENVS10D-24-M	86 × 40 × 71.5	1700	3750	32.3	3216	27.8

Duplex units have two motors and two pumps on one base/tank. Performance based on full system operation with one compressor in reserve per NFPA 99.

TRIPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
10	Base with 80 Remote	BENVS10T-M	129 × 48 × 69	2567	3750	64.6	3216	55.6

Triplex units have three airends and three motors stacked on a common base. Performance based on full system operation with one compressor in reserve per NFPA 99. Optional larger 120 or 240 gallon remote tanks available.

QUADRAPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ICFM	RPM	ICFM
10	Base with 80 Remote	BENVS10Q-M	129 × 70 × 69	3544	3750	96.9	3216	83.4

Quadruplex units have four airends and four motors stacked on a common base. Performance based on full system operation with one compressor in reserve per NFPA 99. Optional larger 120 or 240 gallon remote tanks available.

Gardner Denver®


Gardner Denver, Inc.


1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2017 Gardner Denver, Inc. Printed in U.S.A.
GLCS-ENV-MED-S10 2nd Ed. 2/17



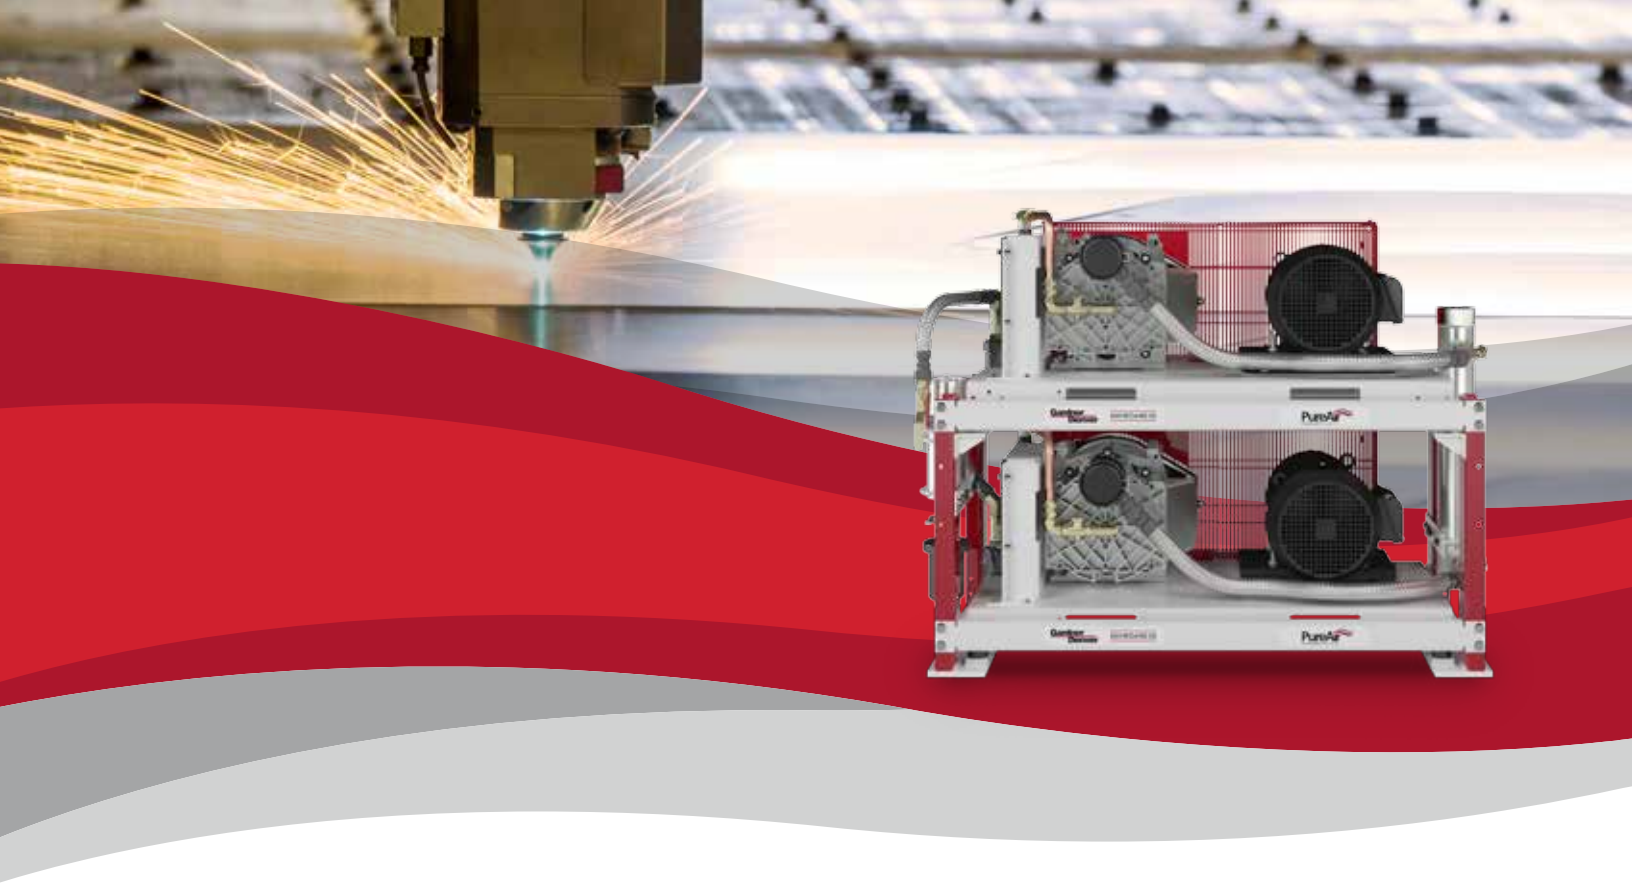

INDUSTRIAL | 10 HP ROTARY SCROLL AIR COMPRESSORS

EnviroAire S10

Gardner Denver EnviroAire compressors provide the reliable, high quality compressed air that you've come to expect from Gardner Denver. EnviroAire compressors offer a wide selection of configurations and top-quality available options. Gardner Denver designed this series specifically for industrial and laboratory applications that require 100% oil-less air. Experience proven results with Gardner Denver—the leader in durability, reliability and efficiency.

Standard Equipment

- Continuous operation, 100% duty cycle
- 5 Micron industrial grade intake air filter
- ASME coded receiver
- Premium efficient TEFC motor
- Unique tip seal design
- Low sound levels and vibration
- Re-greasable bearings
- Integral cooling fan
- Easy accessibility for maintenance
- 1-Year package warranty
- 1-Year airend warranty

Available Options

- Tank Sizes—30, 80, 120 or 240 gallon
 - Galvanized receiver
 - Vinyl (epoxy) lined receiver
- Electronic tank drain
- Mass. code fittings
- Starter
- High temp switch
- Dryer options
 - Refrigerated dryer
 - Desiccant dryer

Gardner
Denver

BARE AIREND

MODEL	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS
SC10	16.8 × 16.8 × 13.9	62

SIMPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
10	Base	BENVS10	38 × 21 × 17	375	3750	31.6	3216	25.3
10	30	HENVS10-3	43 × 24 × 38	650	3750	31.6	3216	25.3
10	80	HENVS10-8	67 × 24 × 42	775	3750	31.6	3216	25.3
10	120	HENVS10-12	71 × 27 × 46	875	3750	31.6	3216	25.3

DUPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
10	Base	BENVS10D	48 × 22 × 36.5	943	3750	63.2	3216	50.6
10	80	HENVS10D-8	65 × 26 × 61.5	1340	3750	63.2	3216	50.6
10	120	HENVS10D-12	69 × 27 × 65.5	1440	3750	63.2	3216	50.6
10	240	HENVS10D-24	86 × 33 × 71.5	1660	3750	63.2	3216	50.6

Simplex CFM values are doubled for duplex units. Duplex units have two motors and two pumps on one base/tank.

TRIPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
10	Base	BENVS10T	48 × 22 × 54.5	1407	3750	94.8	3216	75.9

Simplex CFM values are tripled for triplex units. Triplex units have three airends and three motors stacked on a common base.

QUADRAPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
10	Base	BENVS10Q	48 × 22 × 72	1875	3750	126.4	3216	101.2

Simplex CFM values are quadrupled for Quadraplex units. Quadraplex units have four airends and four motors stacked on a common base.

Gardner Denver®


Gardner Denver, Inc.


1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2017 Gardner Denver, Inc. Printed in U.S.A.
GLCS-ENV-IND-S10 2nd Ed. 2/17



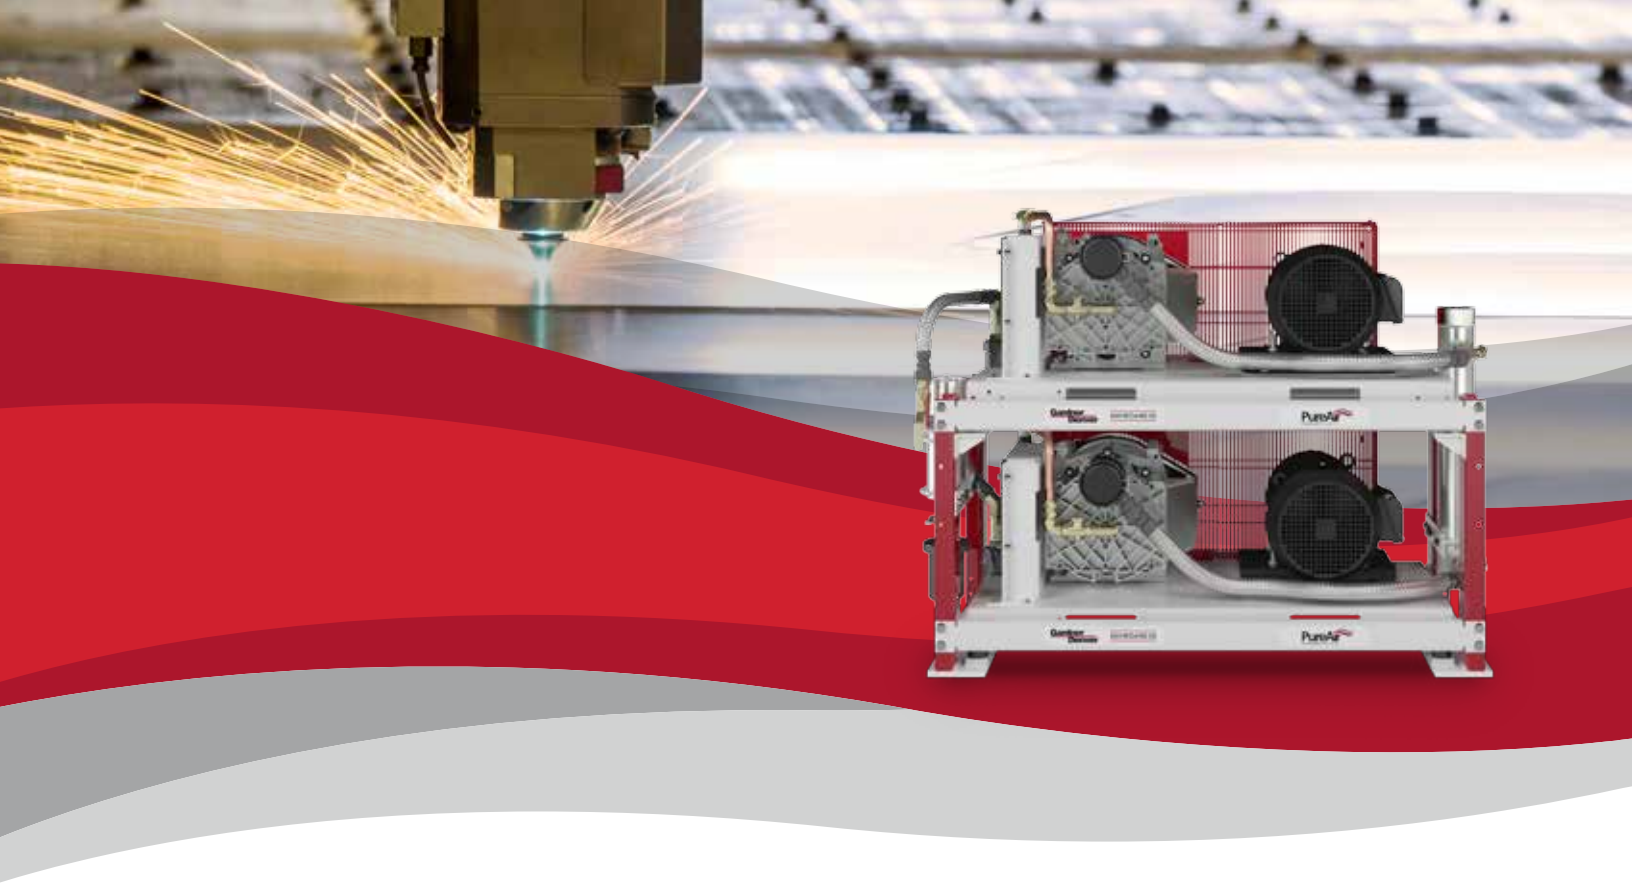

INDUSTRIAL | 7.5 HP ROTARY SCROLL AIR COMPRESSORS

EnviroAire **S7**

Gardner Denver EnviroAire compressors provide the reliable, high quality compressed air that you've come to expect from Gardner Denver. EnviroAire compressors offer a wide selection of configurations and top-quality available options. Gardner Denver designed this series specifically for industrial and laboratory applications that require 100% oil-less air. Experience proven results with Gardner Denver—the leader in durability, reliability and efficiency.

Standard Equipment

- Continuous operation, 100% duty cycle
- 5 Micron industrial grade intake air filter
- ASME coded receiver
- Premium efficient TEFC motor
- Unique tip seal design
- Low sound levels and vibration
- Re-greasable bearings
- Integral cooling fan
- Easy accessibility for maintenance
- 1-Year package warranty
- 1-Year airend warranty

Available Options

- Tank Sizes—30, 80, 120 or 240 gallon
 - Galvanized receiver
 - Vinyl (epoxy) lined receiver
- Electronic tank drain
- Mass. code fittings
- Starter
- High temp switch
- Dryer options
 - Refrigerated dryer
 - Desiccant dryer

Gardner
Denver

BARE AIREND

MODEL	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS
SC7	16.3 × 16.1 × 13.9	61

SIMPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
7.5	Base	BENVS7	38 × 21 × 17	340	3340	22.1	2650	16
7.5	30	HENVS7-3	43 × 24 × 38	615	3340	22.1	2650	16
7.5	80	HENVS7-8	67 × 24 × 42	740	3340	22.1	2650	16
7.5	120	HENVS7-12	71 × 27 × 46	840	3340	22.1	2650	16

DUPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
7.5	Base	BENVS7D	48 × 22 × 36.5	873	3340	44.2	2650	32
7.5	80	HENVS7D-8	65 × 26 × 61.5	1270	3340	44.2	2650	32
7.5	120	HENVS7D-12	69 × 27 × 65.5	1370	3340	44.2	2650	32
7.5	240	HENVS7D-24	86 × 33 × 71.5	1590	3340	44.2	2650	32

Simplex CFM values are doubled for duplex units. Duplex units have two motors and two pumps on one base/tank.

TRIPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
7.5	Base	BENVS7T	48 × 22 × 54.5	1302	3340	66.3	2650	48

Simplex CFM values are tripled for triplex units. Triplex units have three airends and three motors stacked on a common base.

QUADRAPLEX

MOTOR HP	BASE OR TANK CAPACITY GAL.	IDENTIFICATION NUMBER	DIMENSIONS L × W × H IN.	APPROX. SHIP WEIGHT LBS	116 PSI RATING		140 PSI RATING	
					RPM	ACFM	RPM	ACFM
7.5	Base	BENVS7Q	48 × 22 × 72	1735	3340	88.4	2650	64

Simplex CFM values are quadrupled for Quadraplex units. Quadraplex units have four airends and four motors stacked on a common base.

Gardner Denver®

Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
866-440-6241

www.gardnerdenver.com/gdproducts



©2017 Gardner Denver, Inc. Printed in U.S.A.
GLCS-ENV-IND-S7 2nd Ed. 2/17

